
100mm

80mm

TUSA

TIRE INFLATOR

USER MANUAL



Thank You for your Preference for TUSA


support@tusa.co.in

1. TROUBLESHOOTING

Thank you for purchasing the TUSA tire inflator. Don't hesitate to reach out if you have any issues. We're here to help! After-sales Email: support@tusa.co.in

Problem	Possible Reason	Solution
Failure to start / not working	Target tire pressure is lower than actual tire pressure.	Please reset to a higher tire pressure.
	Damaged fuse (please check the fuses at both the power plug and car cigarette lighter).	Please replace the fuse.
Air leakage or unable to reach preset tire pressure	Loose connection between hose and tire valve.	Please check and reconnect.
	The tire valve is blocked by foreign objects.	Please clean foreign objects from the tire valve.
The screen displays "LO" or "HI"	"HI" indicates that the input voltage is greater than 17V, and "LO" indicates that the input voltage is less than 9V.	Please ensure that the input voltage is greater than 9V and less than 17V.

2. PRODUCT OVERVIEW

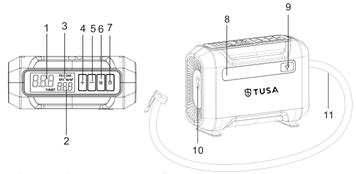

1. Real-Time Pressure Value
2. Preset Pressure Value
3. Pressure Unit
4. + Button
5. - Button
6. M Button
7. Start Button
8. Emergency Light
9. Light Button
10. 12V DC Port
11. Hose

3. PACKAGE CONTENTS



Inflator× 1



DC Wire × 1



Carrying Bag × 1



Schrader-Presta Valve Adaptor× 1

Replacement Fuse× 1 10A

Needle Valve Adaptor× 1

Extension Nozzle× 1



User Manual× 1

Carefully check package contents, if anything is missing or damaged, please contact online customer service for support.

4. BUTTON FUNCTION

1. Press to increase the set pressure value, long press to increase continuously.
2. Press to reduce the set pressure value, long press to reduce continuously.
3. Press to switch from PSI , BAR , KPA , KG/CM².
4. Press to start inflation, or stop inflation.
5. Press to cycle through Spotlight→SOS→Strobe→OFF.

5. USE STEPS

Note: Please start the car before using the tire inflator.

1. Connect the power cord to the tire inflator and the car cigarette lighter.

2. Connect the hose to the tire valve.

3. Set the target tire pressure.

4. Press the start button, and the tire inflator will stop automatically when the target pressure is reached.



If the power plug's red light doesn't come on, it indicates a blown fuse in either the power plug itself or the car cigarette lighter. Please replace the fuse promptly.

Small tips to replace the fuse:
1. Unscrew the cap on the head of the adapter of the DC cable.
2. Take out the old fuse and insert the replacement fuse.
3. Screw back the cap.

6. SPECIFICATIONS

Rated Voltage	DC 12V
Max Current	10A
Max Power	120W
Max Measurement Range	150PSI
Accuracy of Gauge	±1PSI
Inflating Time(195/65 R15 to 0-35psi)	4.5min
Power Cord Length	10ft
Hose Length	2ft
Pressure Units	PSI , BAR , KPA , KG/CM².
LED Lamp Beads	9 PCS
Operating Temperature	14℉~122℉
Storage Temperature	-4℉~140℉

7. SAFEYT INSTRUCTION

1. Read and follow all instructions before use.
2. This product is not suitable for inflating truck tires, the largest tires suitable are pickup truck tires.
3. To avoid damage to the compressor and the cigarette adaptor, please only use a 12V DC (10-15amps) cable with this inflator.
4. Inspect the air inflator before use. If cracked, broken, or damaged parts are found, qualified technicians should repair damaged parts.
5. Do not leave the air inflator unattended while in operation. Keep out of reach of children.
6. Do not point the air outlet toward any person or animal.
7. Do not overinflate products beyond manufacturers' recommendations.
8. Overinflating may cause unexpected injury and burst.
9. Do not use this product for purposes other than its intended use.
10. Do not disassemble or tamper with this inflator.
11. Never expose the air inflator to rain, frost, or temperatures above 60° C or below -30° C.
12. Do not expose the unit to moisture.
13. Ensure the cord is not exposed to hot objects, oil, or sharp edges.
14. Do not put the tire inflator in or around flammable environments.
15. Only use accessories and parts specified in the instruction book or recommended by the manufacturer.

WARRANTY DETAILS & CUSTOMER SERVICE

TUSA is dedicated to delivering top-notch quality and assurance to our valued customers. We're excited to provide a 12 months extended warranty on our products. Your purchase includes a 6 months warranty from the date of receipt. Register your product for an extra 6 months of coverage.

Our Support team is always available to assist you with any TUSA device issues during the warranty period.

Support @tusa.co.in
1800 313 7375
www.tusa.co.in

TUSA