TUSA


VACUUM CLEANER

User Manual



THANK YOU FOR YOUR PREFERENCE FOR TUSA
If you have any problems with our product, please feel free to contact us.
support@tusa.co.in

PRODUCT DESCRIPTION

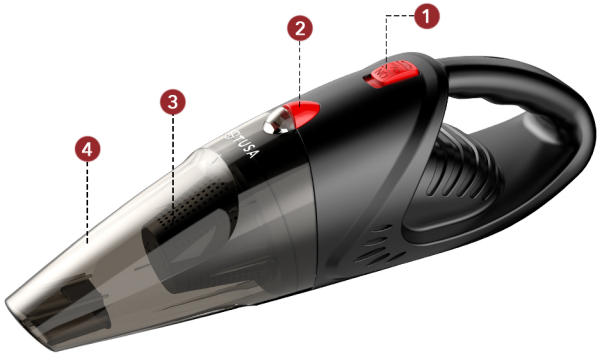




1. Power Switch
2. Dust Cup Release Button
3. Filter
4. Dust Cup
5. Flexible Hose
6. Crevice Nozzle
7. Push-in Brush
8. Filter Cap
9. Filter
10. AC Adaptor
11. DC Connector
12. Cleaning Brush

PRODUCT OPERATION


NOTICE

- Please fully charge the appliance before the first use, and always remember to use the original adapter only.
- Please ensure the appliance is firmly plugged in before charging.
- Please keep the appliance turned off throughout the charging process.


How to Charge



Step1: Turn off the appliance, then connect it with the adapter until the adapter indicator lights up green.




Step2: Plug the adapter in the socket until the adapter indicator turns red.




Step3: When the appliance is fully charged, the adapter indicator will turn green, please unplug the appliance in time.

PRODUCT OPERATION


How to Use

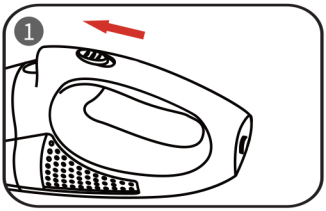


Press the power switch forward to turn on the appliance.

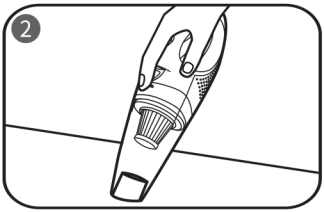


2. Keep the air inlet parallel with the surface when cleaning.

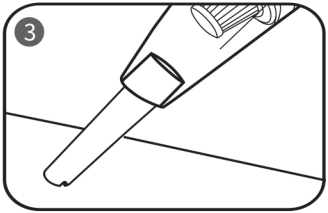

3. Insert the flush end of the crevice nozzle into the airinlet for cleaning corners and cracks.

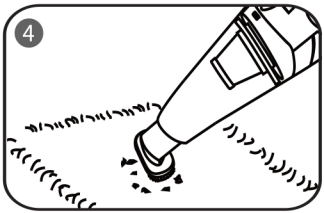

4. Insert the dusting brush into the air inlet for cleaning the carpets and other suede surfaces.

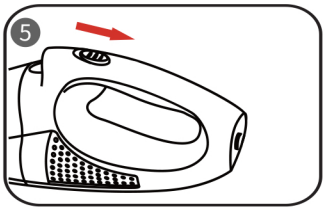


5. Press the power switch back to turn off the appliance.

PRODUCT CLEANING

NOTICE

- If the suction gets weaker, please rinse the filter and air dry it completely to regain good performance.
- Make sure the filter completely fits into the dust cup without gap.
- If the filters are damaged, please contact us to get help.

Support@tusa.co.in

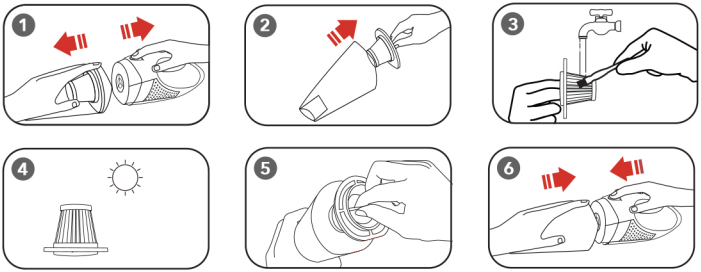

Step1: Press the release button to take off the dust cup.

Step2: Take the filter out from the dust cup.

Step3: Clear the fine dust on the HEPA filter with the cleaning brush and Wash it.

Step4: Air dry the HEPA filter.

Step5: Put the filter back into the dust cup. Keep the flush side downward.

Step6: Install the dust cup back to the appliance. Align the bottom first and buckle It until it clicks.

TROUBLESHOOTING

Malfunction	Possible Cause	Possible Solution
Poor Suction	The dust cup or the filter didn't install securely	Securely install the dust cup and filter.
	The filter is clogged	Clean the filter
	The filter is wet	Air dry the filter completely
	Low battery	Fully charge the appliance
	The product is damaged	Contact the customer service
Charging Fault	No power supply	Ensure that the socket is available
	The adapter is not original	Please use the original adapter
	Battery fault	Charge the appliance for 24 hours to activate the battery
	The adapter is damaged	Contact the customer service
	The battery is damaged	Contact the customer service
The appliance can't work	No battery	Fully charge the appliance
	The appliance is damaged	Contact the customer service

If the vacuum still doesn't work, please contact the customer service team.

Support@tusa.co.in

PRODUCT PARAMETERS

	Wireless	Wired
Rated Volatage	11.1V	DC 12V
Rated Current	8.5A	7A
Battery Capacity	3*2000mAh	–
Charging Time	3 - 4 hrs	–
Duration	~20 mins	–

NOTICE

Please do not use the vacuum without monitoring and make sure it is shut off when not in use. (Use may not exceed 20 minute intervals)

- Do not use vacuum outdoors in rainy or humid conditions.
- Vacuum is not water-proof so do not submerge in water. Store in cool, dry place.
- While in use, please avoid sucking up the following items:
  -Hot objects, for example, cigarette ends, charcoal fire, etc.
  -Sharp debris such as broken glass.
  -Corrosive, aggressive solvent or liquid.
  -Flammable or combustible for example, gasoline or alcohol based products.

WARRANTY DETAILS & CUSTOMER SERVICE

TUSA is dedicated to delivering top-notch quality and assurance to our valued customers. We're excited to provide a 12 months extended warranty on our products. Your purchase includes a 6 months warranty from the date of receipt. Register your product for an extra 6 months of coverage.

Our Support team is always available to assist you with any TUSA device issues during the warranty period.

Support@tusa.co.in

1800 313 7375

www.tusa.co.in


TUSA